




Mine Lighting Systems
Mining Controls Inc.
P.O. Box 1141
Beckley, WV 25802
304-252-6243

Larry.Rowley@elginindustries.com
www.minelinesystems.com

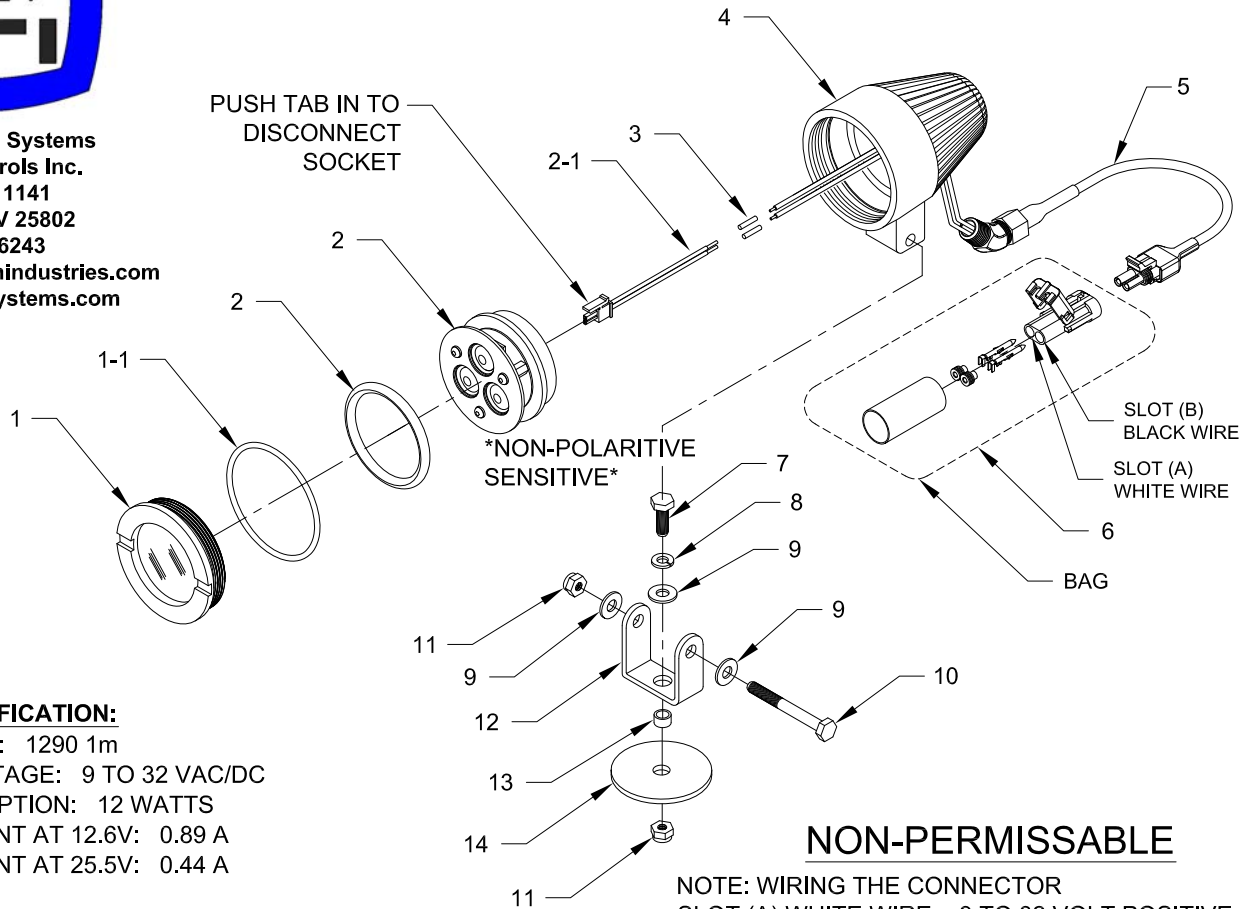

PRODUCT SPECIFICATION:

LUMENS OUTPUT: 1290 lm
OPERATING VOLTAGE: 9 TO 32 VAC/DC
POWER CONSUMPTION: 12 WATTS
NOMINAL CURRENT AT 12.6V: 0.89 A
NOMINAL CURRENT AT 25.5V: 0.44 A


NON-PERMISSABLE

NOTE: WIRING THE CONNECTOR
SLOT (A) WHITE WIRE = 9 TO 32 VOLT POSITIVE
AND (B) BLACK WIRE = 9 TO 32 VOLT NEGATIVE

7030-35880-28

T50 WATER TIGHT SWIVEL MOUNT HEAD LIGHT WITH 12 WATT HIGH OUTPUT LED LAMP ASSEMBLY 9-32 V AC/DC WITH 2 PIN WEATHER PAK PIGTAIL CONNECTOR

Item	Qty.	Part Number	Description
1	1	2010-34128	Clear Lens Assembly
1-1	1	2019-29731-6	O Ring
2	1	2021-36140-7	12 Watt High Output LED 9 to 32V
2-1	1	1059-36140-1	Plug-In Socket Assembly
3	2	1035-20304-5	Pink Butt Splice
4	1	2010-35771-2	Alum. Housing
5	1	1037-34348-51	Weather Pack Pigtail assembly
6	1	1037-34348-6	Weather Pack Receptacle Kit
7	1	1041-50003-3	Bolt 1/4-20 X 1 Hex Head
8	1	1041-50004	1/4" Lock Washer
9	3	1041-50026	1/4" Flat Washer
10	1	1041-50003-18	Bolt 1/4-20 X 2-1/4 Hex Head
11	2	1041-50024-2	Nylon Lock Nut 1/4-20 Hex
12	1	2022-34018	1 7/8 "U" Mounting Bracket
13	1	2010-33323-1	Spacer Tube
14	1	3018-33620-3	Base Pad

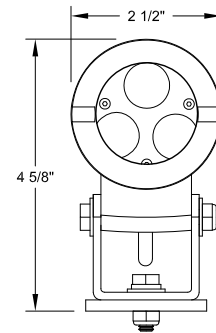

FIXTURE WEIGHT 2 LB. MAX.

